

Glass Wool



GlassRock Building blankets



Description

Glass wool building blankets are manufactured from fine and stable fibers bonded with thermosetting resin and formed into blankets, they are rot proof and free from shot due to its mineral composition.

Application

Used for general thermal, acoustic insulation and fire protection applications such as :

- Walling and partitioning

■ Cryogenic & cold boxes

■ Gen set canopies

■ Prefabricated houses and caravans
- Façade and external walls

■ Steel structures and hangers

■ Poultry farms
- Suspended ceiling

■ Automotive industry

■ HVAC Duct works

Density in Kg/m ³	Dimension in mm		Facing	Thickness in mm
	Length	Width		
13 to 64	20000	1200	None, FSK, Vinyl, BGT ASJ, ALUGLASS or BGF	25 to 100



Product Properties

Property	Performance	Standard
Maximum Service Temperature	450°C. Outer foil temperature limited to 100°C	ASTM C411
Fire retardent	Class 1 / Class O	BS 476 part 6 and 7
Combustibility	Non-combustible	ASTM E 84
Rigidity	Semi- Rigid	ASTM C1101
Shot content	Free of shot	ASTM C 612
Fungi Growth	Does not encourage fungi growth	ASTM C 665
Corrosion Effect	Chemically inert	ASTM C 692-77
Compressive Strength	PCF AT 10% DEFORMATION 5 PCF AT 25% DEFORMATION 10	-----
NRC Value	0.75 to 1.24	ASTM C 423
Moisture absorption	less than 0.2% by volume	ASTM C 533

Thermal Resistance (R Value)

GlassRock building blankets nominal thermal resistance confirming to ASTM C167

THICKNESS (mm)	THERMAL RESISTANCE (m ² K/W) AT 25°C MEAN TEMPERATURE					
	13	16	18	20	24	32
25	0.610	0.641	0.658	0.694	0.714	0.765
40	0.976	1.026	1.053	1.111	1.143	1.214
50	1.220	1.282	1.316	1.389	1.429	1.490
75	1.829	1.923	1.974	2.083	2.143	2.210
90	2.195	2.308	2.368	2.500	2.571	2.642
100	2.439	2.564	2.632	2.778	2.857	2.928



Packaging & Storage:

GlassRock building blankets are supplied in shrink wrapped polyethylene and must be stored in the original packaging, protected from the weather and off the ground, in case of getting wet it can be dried and used without changes to its properties.

Durability:

GlassRock building blankets are odourless, nonhygroscopic, rat proof, does not sustain vermin or encourage the fungi growth, mould or bacteria.

Environmental:

GlassRock building blankets are free from CFCs, HCFCs and any other material with ozone depletion potential so it's environment friendly product.



GlassRock

28 Road 265, New Maadi, Cairo, Egypt.
P.O. Box 120 New Maadi
Tel : +202 2519 2548
info@glassrock.com.eg

Postal Code: 11435 Cairo, Egypt.
Fax: +202 2519 2547
www.glassrock.com.eg

Glass Wool

GlassRock Building Boards



Description


Glass wool building boards are manufactured from fine and stable glasswool bonded with thermosetting resin and formed into semi-rigid and rigid boards, they are rot proof and free from shot due to its mineral composition

Application

Used for general thermal, acoustic insulation and fire protection applications such as :

- Walling and partitioning
 - Cryogenic & cold boxes
 - Gen set canopies
 - Prefabricated houses and caravans
- Façade and external walls
 - Steel structures and hangers
 - Poultry farms
- Suspended ceiling
 - Automotive industry
 - HVAC Duct works

Density in Kg/m ³	Dimension in mm		Facing	Thickness in mm
	Length	Width		
24 to 96	1200	600	None, FSK, Vinyl, BGT ASJ, ALUGLASS or BGF	25 to 100

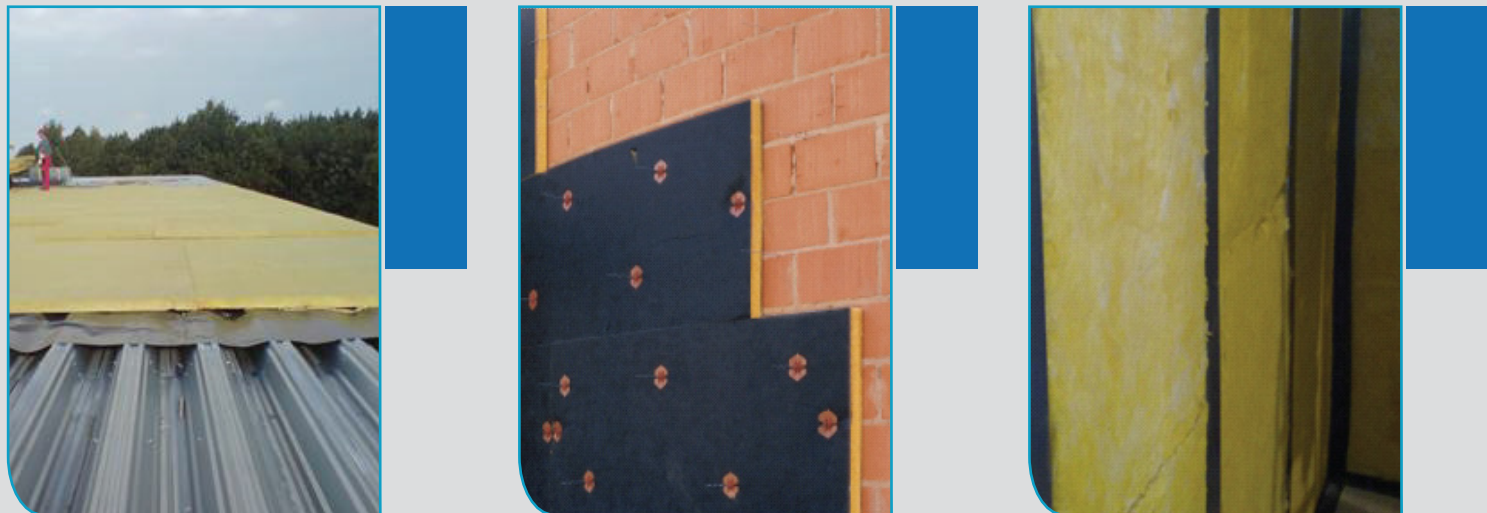

Product Properties

Property	Performance	Standard
Maximum Service Temperature	450°C. Outer foil temperature limited to 100°C	ASTM C411
Fire retardent	Class 1 / Class O	BS 476 part 6 and 7
Combustibility	Non-combustible	ASTM E 84
Rigidity	Semi- Rigid and Rigid	ASTM C1101
Shot content	Free of shot	ASTM C 612
Fungi Growth	Does not encourage fungi growth	ASTM C 665
Corrosion Effect	Chemically inert	ASTM C 692-77
Compressive Strength	PCF AT 10% DEFORMATION 5 PCF AT 25% DEFORMATION 10	-----
NRC Value	0.75 to 1.24	ASTM C 423
Moisture absorption	less than 0.2% by volume	ASTM C 533

Thermal Resistance (R Value)

GlassRock building boards nominal thermal resistance confirming to ASTM C167

THICKNESS (mm)	THERMAL RESISTANCE (m/ W.K) AT 25°C MEAN TEMPERATURE						
	24	32	36	48	64	80	96
25	0.714	0.758	0.781	0.806	0.781	0.714	0.714
40	1.143	1.212	1.250	1.290	1.250	1.143	1.143
50	1.429	1.515	1.563	1.613	1.563	1.429	1.429
65	1.859	1.970	2.031	2.097	2.031	1.859	1.859
75	2.143	2.273	2.344	2.419	2.344	2.143	2.143
100	2.857	3.030	3.125	3.226	3.125	2.857	2.857



Packaging & Storage:

GlassRock building boards are supplied in shrink wrapped polyethylene and must be stored in the original packaging, protected from the weather and off the ground, in case of getting wet it can be dried and used without changes to its properties.

Durability:

GlassRock building boards are odourless, nonhygroscopic, rat proof, does not sustain vermin or encourage the fungi growth, mould or bacteria.

Environmental:

GlassRock building boards are free from CFCs, HCFCs and any other material with ozone depletion potential so it's environment friendly product.



GlassRock

28 Road 265, New Maadi, Cairo, Egypt.
P.O. Box 120 New Maadi
Tel : +202 2519 2548
info@glassrock.com.eg

Postal Code: 11435 Cairo, Egypt.
Fax: +202 2519 2547
www.glassrock.com.eg